

ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804

| | |
|--------------------------|--------------------------------------|
| Owner of the Declaration | Türk Ytong Sanayi A.Ş. |
| Programme holder | Institut Bauen und Umwelt e.V. (IBU) |
| Publisher | Institut Bauen und Umwelt e.V. (IBU) |
| Declaration number | EPD-YTO-20150044-IAD1-EN |
| Issue date | 22.04.2015 |
| Valid to | 21.04.2020 |

Ytong® Autoclaved Aerated Concrete

TÜRK YTONG SANAYİ A.Ş.

www.bau-umwelt.com / <https://epd-online.com>



General Information

| | |
|---|---|
| <p>Türk Ytong Sanayi A.Ş.</p> | <p>Ytong® Autoclaved Aerated Concrete</p> |
| <p>Programme holder IBU - Institut Bauen und Umwelt e.V. Panoramastr. 1 10178 Berlin Germany</p> | <p>Owner of the Declaration Türk Ytong Sanayi A.Ş. Central Production Site – Pendik Factory Pendik, 34899, Istanbul / TURKEY</p> |
| <p>Declaration number EPD-YTO-20150044-IAD1-EN</p> | <p>Declared product / Declared unit Autoclaved Aerated Concrete Block / 1 cubic meter (m3)</p> |
| <p>This Declaration is based on the Product Category Rules: Aerated concrete, 07.2014 (PCR tested and approved by the SVR)</p> | <p>Scope: This Life Cycle Assessment study is carried out for Autoclaved Aerated Concrete (AAC) Blocks produced in the manufacturing plant of TURK YTONG located in Pendik, Antalya, Bilecik and Trakya, Turkey. This EPD is prepared as an average EPD for Autoclaved Aerated Concrete Blocks product group manufactured in these plants. The data used in this study is collected from four manufacturing facilities and a weighted average is calculated as an annual representative value for the year 2013. The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.</p> |
| <p>Issue date 22.04.2015</p> | <p>Verification The CEN Norm /EN 15804/ serves as the core PCR Independent verification of the declaration according to /ISO 14025/ <input type="checkbox"/> internally <input checked="" type="checkbox"/> externally</p> |
| <p>Valid to 21.04.2020</p> <p></p> | <p></p> |
| <p>Prof. Dr.-Ing. Horst J. Bossenmayer (President of Institut Bauen und Umwelt e.V.)</p> | <p>Mr Olivier Muller (Independent verifier appointed by SVR)</p> |

Product

Product description

The products mentioned are unreinforced building blocks in various formats made of autoclaved aerated concrete /TS EN 771-4: 2011/. AAC belongs to the porous steam-cured light-weight concrete group.

The ground quartzite is mixed with gypsum, cement, quicklime and recycled AAC materials (slurry and powder) that has been reduced to small pieces, adding water and aluminum powder, in a mixer, until it becomes a watery suspension. It is then poured into a casting mould. The aluminum reacts in an alkaline milieu. Thus, gaseous hydrogen is formed which creates pores in the mass and escapes without leaving any residue. The pores usually have a diameter 0.5-1.5 mm and are filled exclusively with air. After setting once, semisolid raw blocks are created, from which the autoclaved aerated concrete building components are then cut with high precision.

The formation of the final qualities of the building component occurs during the subsequent steam-curing over 5 to 12 hours at approximately 190° C with

approximately 12 bar pressure in steam pressure kettles or autoclaves, as they are called. The used substances create calcium hydro silicates, which correspond to the naturally occurring mineral tobermorite. The reaction of the material is complete when removed from the autoclave. Therefore, the reaction does not take as long as the hardening of concrete. Once the steaming process is complete, the steam is used for other autoclave cycles. AAC blocks are then piled onto wooden pallets and shrink-wrapped in polyethylene wrap.

Application

Unreinforced AAC building blocks are used for brick-laid, monolithic, load bearing and non-loadbearing infill walls. As intended, direct contact with ground water is avoided thanks to the constructional features.

Technical Data

AAC Ytong Blocks demonstrate the following constructional performance:

Constructional data

| Name | Value | Unit |
|---|--------------|-------------------|
| Compressive strength \geq | 1.5 - 5 | N/mm ² |
| Gross density | 300 - 600 | kg/m ³ |
| Tensile strength | 0.24 - 1 | N/mm ² |
| Modulus of elasticity | 750 - 2250 | N/mm ² |
| Thermal conductivity | 0.085 - 0.16 | W/(mK) |
| Water vapour diffusion resistance factor acc. to EN 4108-4 | 0,5 | - |
| Moisture content at 23 °C, 80% | 4 | M.-% |
| Shrinkage as per ZA-PBP-07-01, modified EN 680 must be indicated; adherence to the shrinkage value of < 0.2 mm/m should be guaranteed | 0.2 | mm/m |

Base materials / Ancillary materials

| Name | Value | Unit |
|-----------------------|-----------|------|
| Quartzite | 45-65 | % |
| Portland cement | 15-30 | % |
| Gypsum | 2-5 | % |
| Quick Lime | 6-20 | % |
| Aluminium powder | 0.05-0.15 | % |
| Recycled Ytong Slurry | 10-20 | % |
| Recycled Ytong Powder | 4-10 | % |

In addition, 40-60% water is used (in relation to the solid substances).

Reference service life

AAC does not change once it leaves the autoclaves. When used as intended, it is boundlessly stable. According to the Sustainable Building Guideline of IBU the average life expectancy of AAC is 100 years.

In this study Reference Life Value is not taken into consideration during the calculations, since the system boundary of this EPD is cradle to gate.

LCA: Calculation rules

Declared Unit

According to the "PCR Guidance-Texts, the functional unit for this product category is defined as 1 cubic meter (m³) of Autoclaved Aerated Concrete (AAC) Block. As a result of this, the life cycle assessment results are presented for 1 m³ of the analyzed product group.

Declared unit

| Name | Value | Unit |
|---------------------------|--------|-------------------|
| Declared unit | 1 | m ³ |
| Gross density | 398 | kg/m ³ |
| Conversion factor to 1 kg | 0.0025 | - |

System boundary

Type of the EPD: cradle to gate

The system boundaries of this life cycle assessment study are considered as cradle to gate, since all the modules except A1-A3 product stage are not declared within the scope of this study. This means the system boundary covers Ytong AAC Block products from extraction of raw material to the production of finished packed product at the factory gate (cradle to gate).

The product stage contains A1 (extraction, processing, production of raw materials), A2 (Transport to the manufacturer and internal transport) and A3 (Manufacturing operations) modules. These are declared separately.

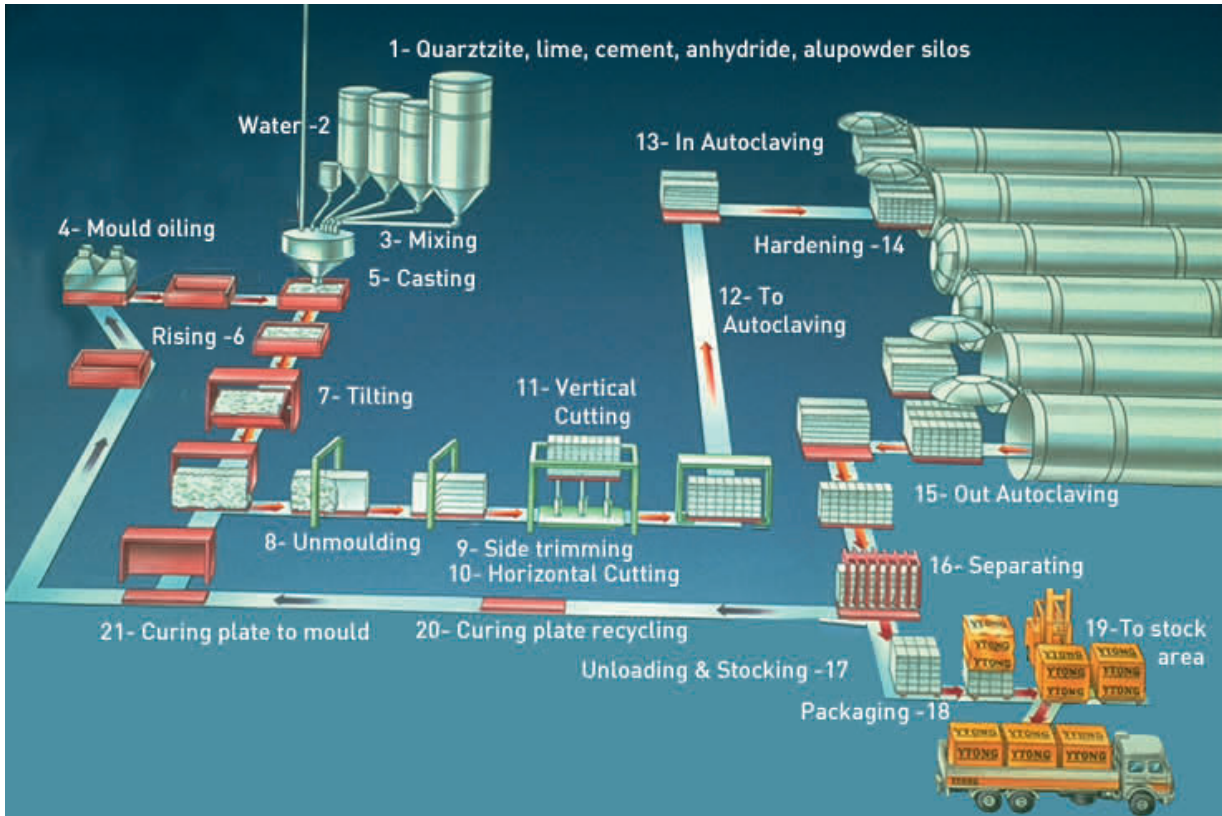


Figure 1: Process Flow of Ytong-AAC Block Production

Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to /EN 15804/ and the building context, respectively the product-specific characteristics of performance, are taken into account.

LCA: Scenarios and additional technical information

As stated in the system boundary chapter above, only A1, A2 and A3 modules are declared within the scope of this study.

Therefore, there are no scenarios provided below regarding the other modules B1-B7, A4, A5, C1-C4 and D.

In this study, closed-loop recycling was used. Ytong plant utilizes recycled waste (slurry and powder) internally.

LCA: Results

DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE NOT DECLARED)

| PRODUCT STAGE | | | CONSTRUCTION PROCESS STAGE | | USE STAGE | | | | | | | END OF LIFE STAGE | | | | BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARIES |
|---------------------|-----------|---------------|-------------------------------------|----------|-----------|-------------|--------|---------------------------|-----------------------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|---|
| Raw material supply | Transport | Manufacturing | Transport from the gate to the site | Assembly | Use | Maintenance | Repair | Replacement ¹⁾ | Refurbishment ¹⁾ | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery-Recycling-potential |
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| X | X | X | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND | MND |

RESULTS OF THE LCA - ENVIRONMENTAL IMPACT: AAC Blocks /1 m3

| Parameter | Unit | A1 | A2 | A3 |
|--|---|---------|---------|---------|
| Global warming potential | [kg CO ₂ -Eq.] | 1.25E+2 | 4.72E+0 | 3.74E+1 |
| Depletion potential of the stratospheric ozone layer | [kg CFC11-Eq.] | 5.34E-6 | 3.28E-7 | 4.25E-7 |
| Acidification potential of land and water | [kg SO ₂ -Eq.] | 3.23E-1 | 2.19E-2 | 1.40E-1 |
| Eutrophication potential | [kg (PO ₄) ³ -Eq.] | 5.20E-2 | 4.97E-3 | 3.48E-2 |
| Formation potential of tropospheric ozone photochemical oxidants | [kg ethene-Eq.] | 2.86E-2 | 7.08E-4 | 6.59E-3 |
| Abiotic depletion potential for non-fossil resources | [kg Sb-Eq.] | 5.90E-5 | 1.08E-5 | 4.00E-6 |
| Abiotic depletion potential for fossil resources | [MJ] | 4.17E+2 | 6.95E+1 | 4.48E+2 |

RESULTS OF THE LCA - RESOURCE USE: AAC Blocks /1 m3

| Parameter | Unit | A1 | A2 | A3 |
|--|-------------------|---------|---------|---------|
| Renewable primary energy as energy carrier | [MJ] | 1.21E+1 | 0.00E+0 | 0.00E+0 |
| Renewable primary energy resources as material utilization | [MJ] | 0.00E+0 | 0.00E+0 | 0.00E+0 |
| Total use of renewable primary energy resources | [MJ] | 1.21E+1 | 0.00E+0 | 0.00E+0 |
| Non-renewable primary energy as energy carrier | [MJ] | 7.90E+2 | 7.55E+1 | 4.65E+2 |
| Non-renewable primary energy as material utilization | [MJ] | 0.00E+0 | 0.00E+0 | 0.00E+0 |
| Total use of non-renewable primary energy resources | [MJ] | 7.90E+2 | 7.55E+1 | 4.65E+2 |
| Use of secondary material | [kg] | - | - | - |
| Use of renewable secondary fuels | [MJ] | - | - | - |
| Use of non-renewable secondary fuels | [MJ] | - | - | - |
| Use of net fresh water | [m ³] | 4.18E-2 | 1.61E-3 | 4.42E-1 |

RESULTS OF THE LCA – OUTPUT FLOWS AND WASTE CATEGORIES: AAC Blocks /1 m3

| Parameter | Unit | A1 | A2 | A3 |
|-------------------------------|------|----|----|---------|
| Hazardous waste disposed | [kg] | - | - | 1.21E-1 |
| Non-hazardous waste disposed | [kg] | - | - | 4.88E-1 |
| Radioactive waste disposed | [kg] | - | - | - |
| Components for re-use | [kg] | - | - | - |
| Materials for recycling | [kg] | - | - | - |
| Materials for energy recovery | [kg] | - | - | - |
| Exported electrical energy | [MJ] | - | - | - |
| Exported thermal energy | [MJ] | - | - | - |

References

PCR Part B

Institut Bauen und Umwelt e.V., Berlin (pub.): Product Category Rules for Construction Products from the range of Environmental Product Declarations of Institut Bauen und Umwelt (IBU), Part B: Requirements on the EPD for Aerated concrete, 12.07.2014
www.bau-umwelt.de

EN 4108-4

Thermal insulation and energy economy in buildings - Part 4: Hygrothermal design values

TS EN 771-4: 2011

Specification for masonry units - Part 4: Autoclaved aerated concrete masonry units

EN 680: 2005 / ZA-PBP 07 01

Determination of the drying shrinkage of autoclaved aerated concrete

SUSTAINABLE BUILDING GUIDELINE

http://www.iisbe.org/iisbe/gbprn/documents/policies/guidelines/Germany_guideline_SB.pdf

TAEK

Turkish Atomic Energy Authority:
<http://www.taek.gov.tr/en/home.html>

TURKAK

Turkish Accreditation Agency:
http://www.turkak.org.tr/TURKAKSITE/Default_eng.aspx

1999/31/EC and 2003/33/EC:

Council Directive on the Landfill of Waste /1999/31/EC/ and the related Council Decision /2003/33/EC/

Institut Bauen und Umwelt

Institut Bauen und Umwelt e.V., Berlin(pub.):
Generation of Environmental Product Declarations (EPDs);

General principles

for the EPD range of Institut Bauen und Umwelt e.V. (IBU), 2013/04
www.bau-umwelt.de

ISO 14025

DIN EN ISO 14025:2011-10: Environmental labels and declarations — Type III environmental declarations — Principles and procedures

EN 15804

EN 15804:2012-04+A1 2013: Sustainability of construction works — Environmental Product Declarations — Core rules for the product category of construction products

**Publisher**

Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Tel +49 (0)30 3087748- 0
Fax +49 (0)30 3087748- 29
Mail info@bau-umwelt.com
Web www.bau-umwelt.com

**Programme holder**

Institut Bauen und Umwelt e.V.
Panoramastr. 1
10178 Berlin
Germany

Tel +49 (0)30 - 3087748- 0
Fax +49 (0)30 - 3087748 - 29
Mail info@bau-umwelt.com
Web www.bau-umwelt.com

**Author of the Life Cycle Assessment**

ALTENSIS
Kayisdagi Cad. Baris Sk. 2
34750 Istanbul
Turkey

Tel + 90 216 410 61 35
Fax + 90 216 410 61 53
Mail info@altensis.com
Web www.altensis.com

**Owner of the Declaration**

Türk Ytong Sanayi A.S.
Pendik Ytong
34899 Istanbul
Turkey

Tel +90 216396 66 00
Fax +90 216396 19 61
Mail ytong@ytong.com.tr
Web <http://www.ytong.com.tr>